

Characteristics


□ Application

Any kind of Yarn with the range of Ne16 – 40 with High Spindle Speed

□ Characteristics

The optimum heat treatment and profile have been adapted on the raw material, which enables short time start up after the traveller changing, extension on the life time, and the high performance.

Performance

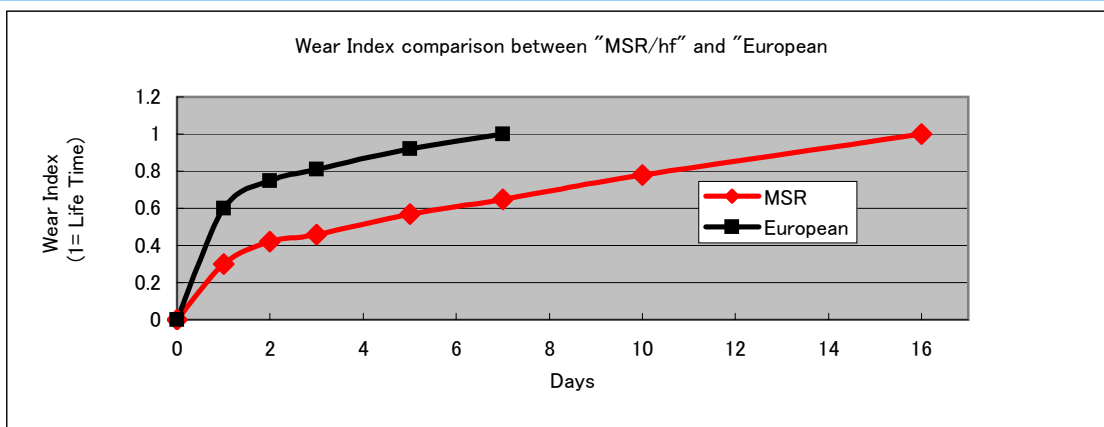

The less wear index in the beginning of operation enables a short time start up and keep stable condition for long operational time which relate to a expectation for a longer service life over double times from the conventional travellers.

General Practical Use

Yarn(Ne)	Ring diameter (mm)	SP(rpm) (MAX)	Traveller	Traveller Life(days)	
				MSR/hf	European
CD16	42	17000	1	20	5
CD20	38	17000	2/0	15	6
CD20	40	17700	1/0	16	7
CD20	38	17700	1/0	13	6
CD20	38	17500	2/0	9	4
CD32	40	19200	6/0	19	5